




ESPECIFICACION GRAFICA PARA BOMBA 105110

CURVA DE OPERACION

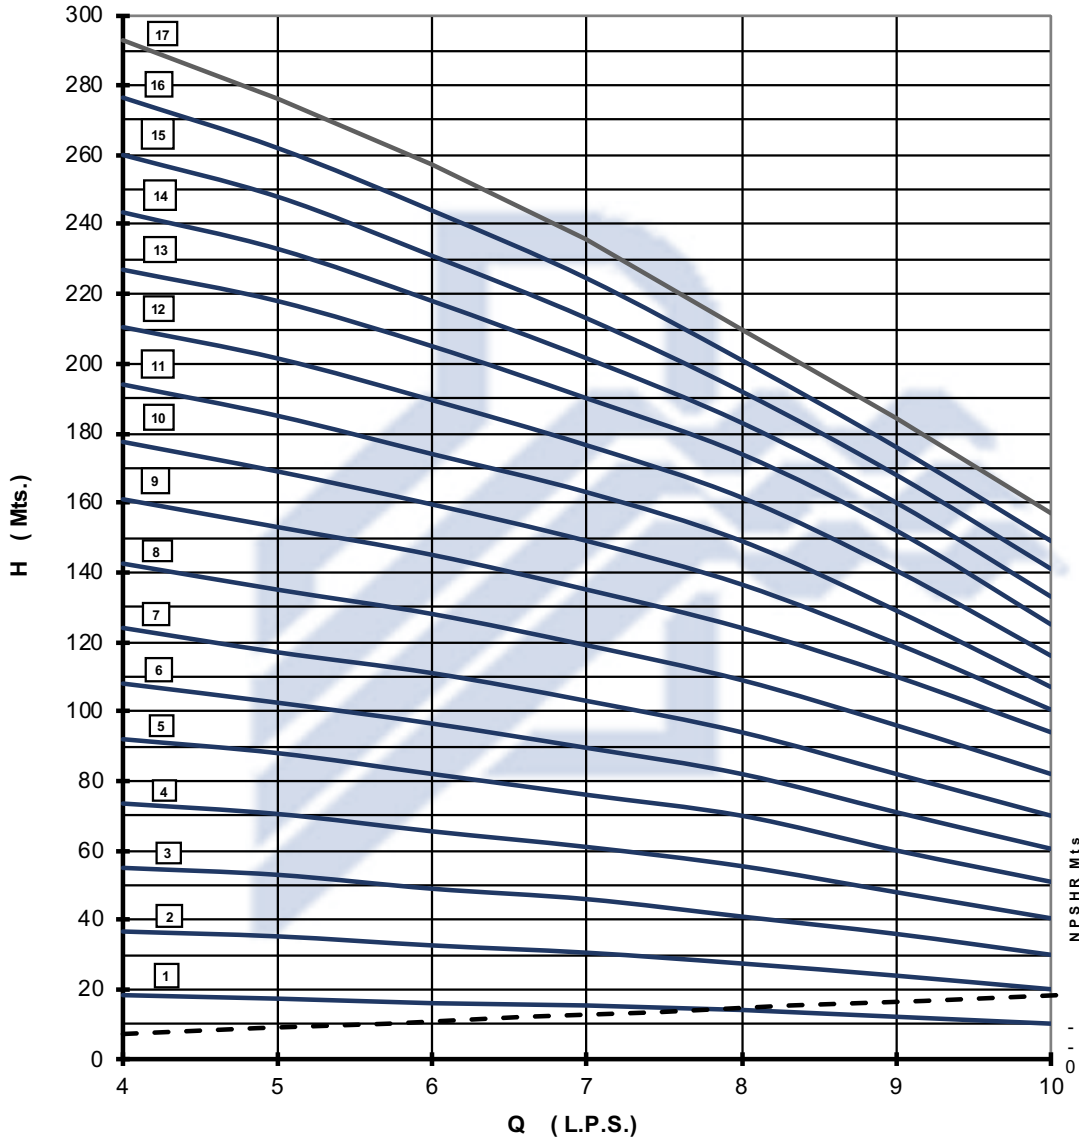

| COMBINACIONES | |
|---------------|-------------|
| Bomba | Motor |
| N° DE PASOS | MS acoplado |
| 1 | 4 / 6 |
| 2 | 4 / 6 |
| 3 | 7 / 6 |
| 4 | 10 / 6 |
| 5 | 10 / 6 |
| 6 | 15/6 - 15/8 |
| 7 | 15/6 - 15/8 |
| 8 | 20/6 - 20/8 |
| 9 | 20/6 - 20/8 |
| 10 | 20/6 - 20/8 |
| 11 | 25/6 - 25/8 |
| 12 | 25/6 - 25/8 |
| 13 | 25/6 - 25/8 |
| 14 | 30/6 - 30/8 |
| 15 | 30/6 - 30/8 |
| 16 | 30/6 - 30/8 |
| 17 | 30/6 - 30/8 |

| CORRECCIÓN DE EFICIENCIA | |
|--------------------------|----------|
| N° Pasos | Puntos % |
| 1 | - 4 |
| 2 | - 3 |
| 3 | - 2 |
| 4 | - 1 |
| 5 | - 0 |

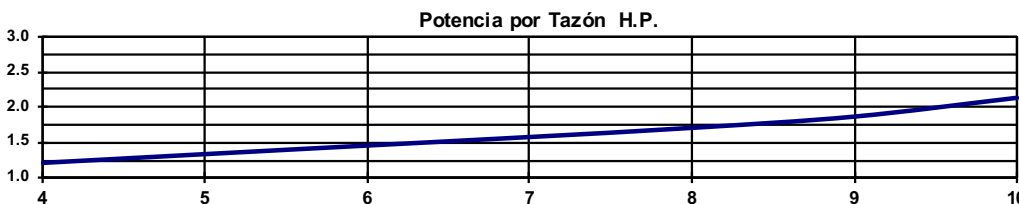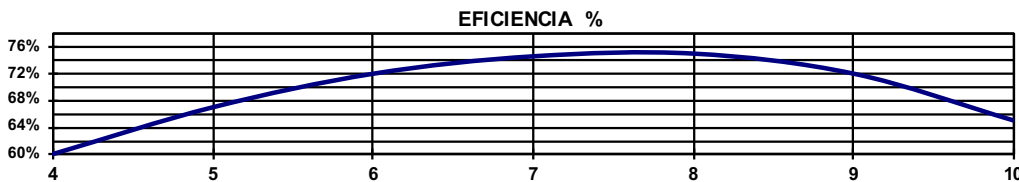

OBSERVACIONES:

- * La bomba pueden operar en cualquier punto de la curva.
- * Máx. temperatura agua 30°C.
- * Temperatura Mayor a 31° C. consultar con fábrica.

Modelo: 105110

60 Ciclos, 2 Polos, 3500 RPM