


REVISIÓN	EMISIÓN
0	Marzo 2019


**ESPECIFICACION GRAFICA PARA BOMBA 107132**

**CURVA DE OPERACION**

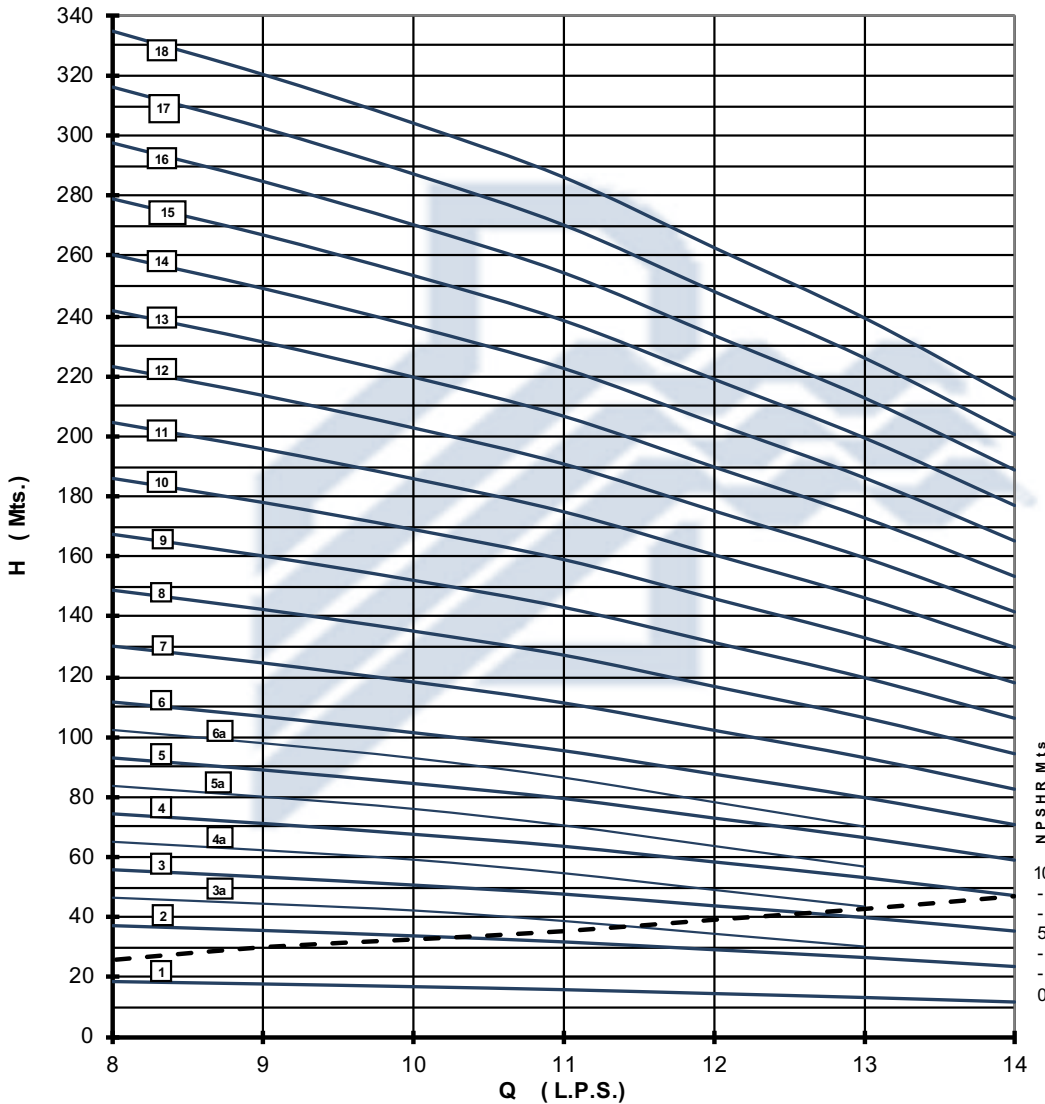

COMBINACIONES	
Bomba	Motor
Nº de Pasos	MS acoplado
1	4 / 6
2	7 / 6
3a	10 / 6
3	10 / 6
4a	15/6 - 15/8
4	15/6 - 15/8
5a	15/6 - 15/8
5	20/6 - 20/8
6a	20/6 - 20/8
6	20/6 - 20/8
7	25/6 - 25/8
8	30/6 - 30/8
9	30/6 - 30/8
10	40/6 - 40/8
11	40/6 - 40/8
12	40/6 - 40/8
13	50/6 - 50/8
14	50/6 - 50/8
15	50/6 - 50/8
16	60/8 - 60/10
17	60/8 - 60/10
18	60/8 - 60/10

CORRECCIÓN DE EFICIENCIA	
Nº Pasos	Puntos %
1	- 4
2	- 3
3	- 2
4	- 1
5	- 0

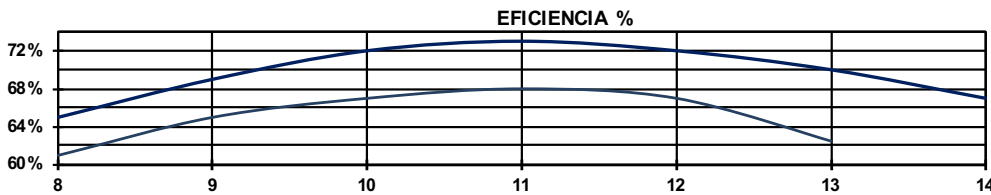

OBSERVACIONES:
* La bomba puede operar en cualquier punto de la curva.
* Máx. temperatura agua 30°C.
* Temperatura Mayor a 31° C consultar con fábrica.
<b>Modelo: 107132</b>
60 Ciclos, 2 Polos, 3500 RPM