



ESPECIFICACION GRAFICA PARA BOMBA 98122

CURVA DE OPERACION

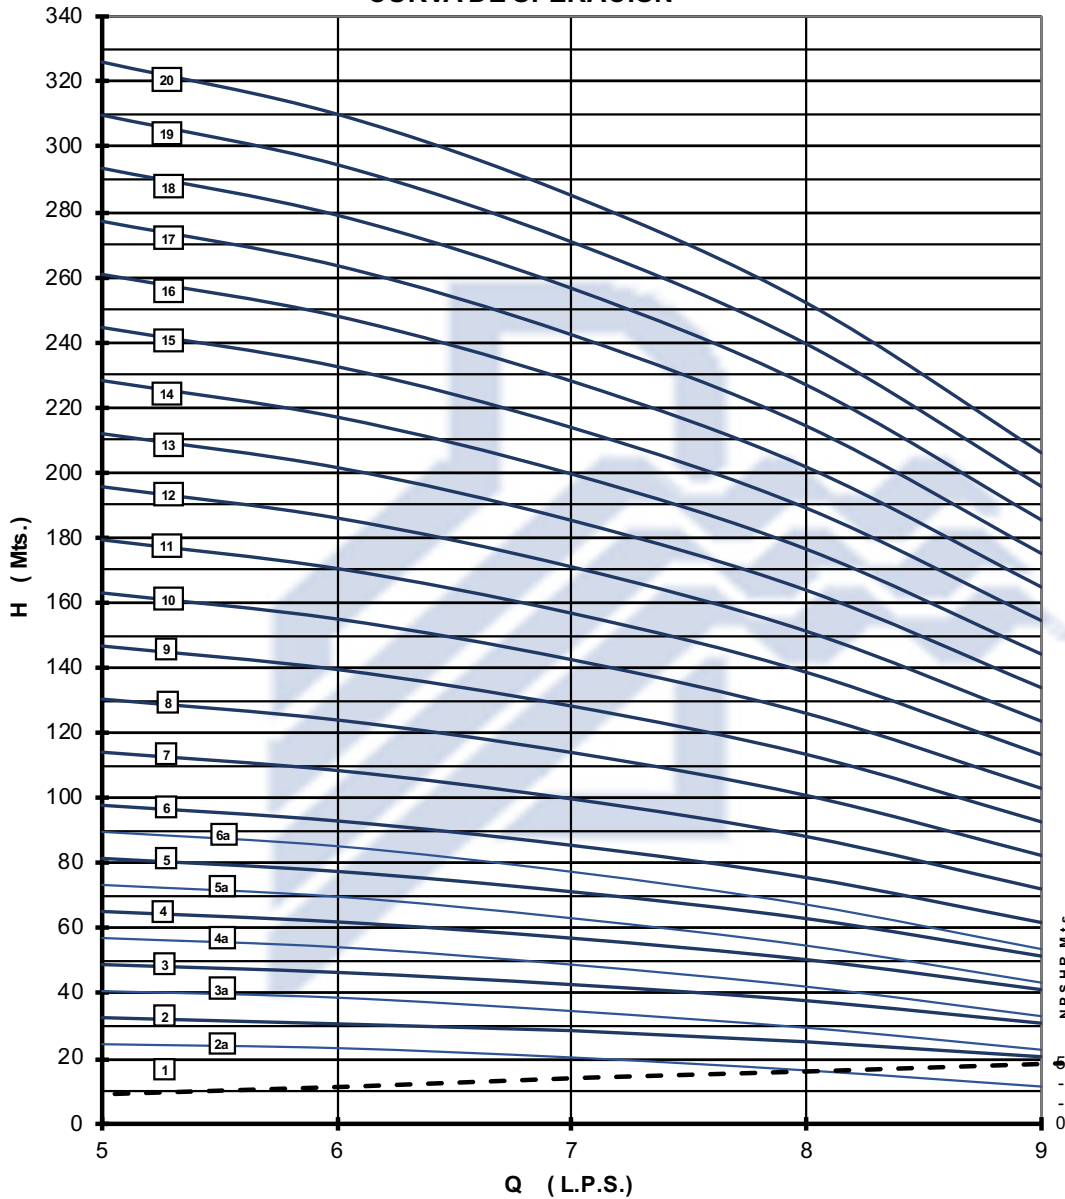

COMBINACIONES	
Bomba	Motor
N° de Pasos	MS acoplado
1a	4 / 6
1	4 / 6
2a	4 / 6
2	4 / 6
3a	7 / 6
3	7 / 6
4a	7 / 6
4	7 / 6
5a	10 / 6
5	10 / 6
6a	15 / 6
6	15 / 6
7	15 / 6
8	15 / 6
9	20 / 6
10	20 / 6
11	25 / 6
12	25 / 6
13	25 / 6
14	30 / 6
15	30 / 6
16	40 / 6
17	40 / 6
18	40 / 6
19	40 / 6
20	40 / 6

CORRECCIÓN DE EFICIENCIA	
N° Pasos	Puntos %
1	- 4
2	- 3
3	- 2
4	- 1
5	- 0

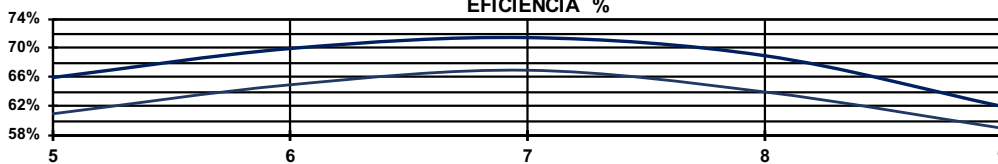

OBSERVACIONES:

- * La bomba operará en cualquier punto de la curva.
- * Máx. temperatura agua 30°C.
- * Temperatura Mayor a 31° C. consultar con fábrica.

Modelo: 98122

60 Ciclos, 2 Polos, 3500 RPM